
NERIVAL


Solenoidi tappilukko DX-2000

Tekniset tiedot


- Asennus: Pinta-asennus, vaakasuoraan tai alaspäin
- Toimintaperiaate: Fail secure, jännitteettömänä lukossa
- Mekaaninen avaus: Lukkosylinteri, sis. 4 kpl avaimia
- Jännite: 24VDC
- Virrankulutus: Toimintavirta 3,0A / Valmiustila 0,35A
- Lukkorungon mitat: 329,5 × 41 × 46 mm
- Pultin mitat: 29,5 mm × ø17,8 mm
- Pitovoima: 2000 kg
- Materiaali: Ruostumaton teräs 304
- Lukon tilatieto: NO / NC / COM
- IP luokitus: IP55
- Käyttölämpötila: -20°C - +50°C
- Paino: 1,8 kg

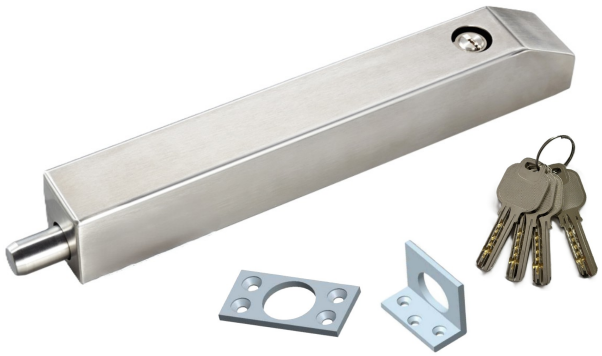

Mitat (mm)

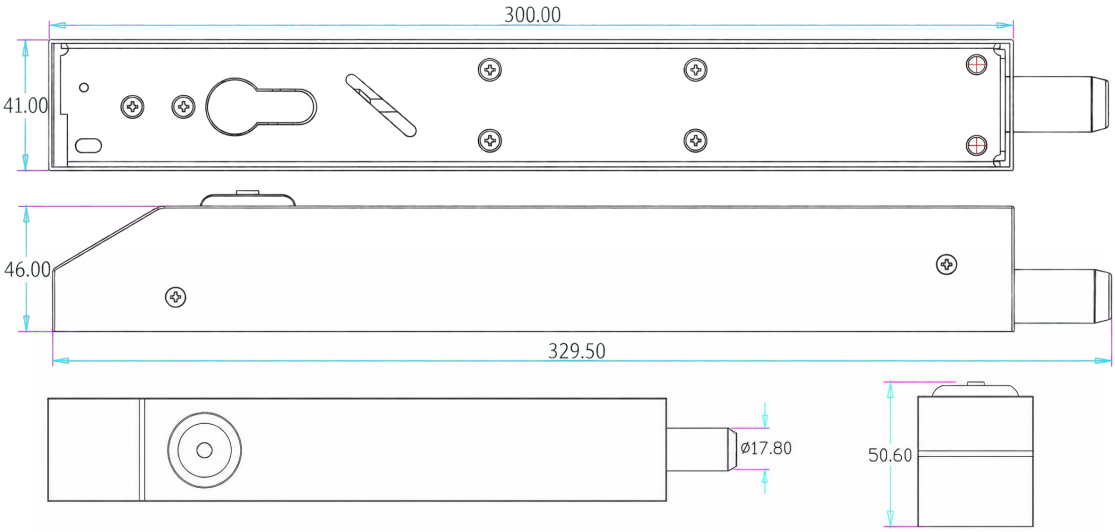


Kytkentä

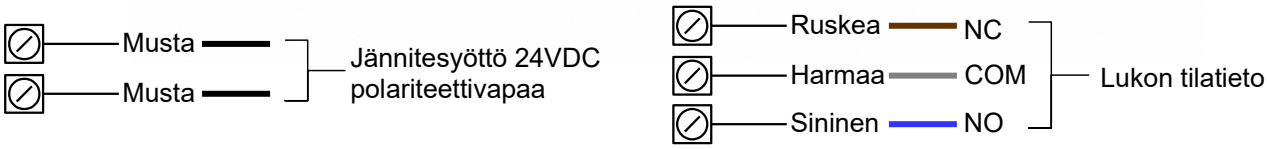

Asennusesimerkki



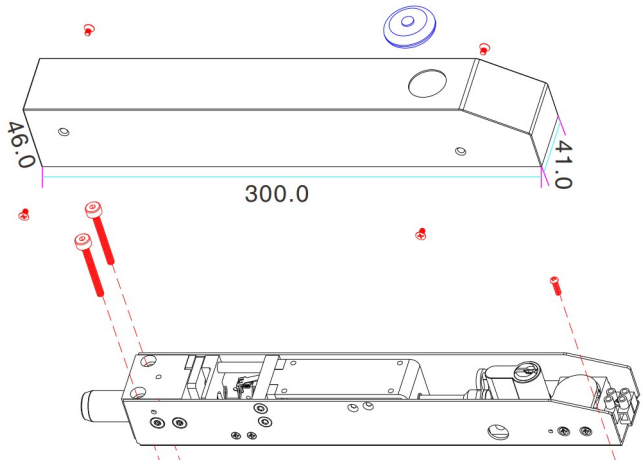


NERIVAL


Solenoid bolt lock DX-2000

Specifications


- Installation: Surface-mounted, horizontally or downward
- Operating principle: Fail secure, locked when power off
- Mechanical override: Lock cylinder, incl. 4 keys
- Voltage: 24VDC
- Current consumption: Operating current 3.0A / Standby 0.35A
- Lock body dimensions: 329.5 × 41 × 46 mm
- Bolt dimensions: 29.5 mm × Ø17.8 mm
- Holding force: 2000 kg
- Material: Stainless steel 304
- Lock status output: NO / NC / COM
- IP rating: IP55
- Operating temperature: -20°C to +50°C
- Weight: 1.8 kg

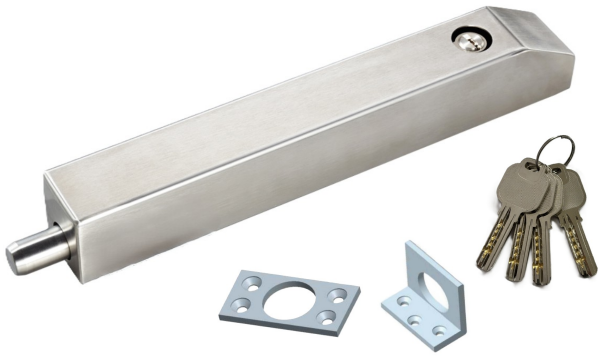

Dimensions (mm)

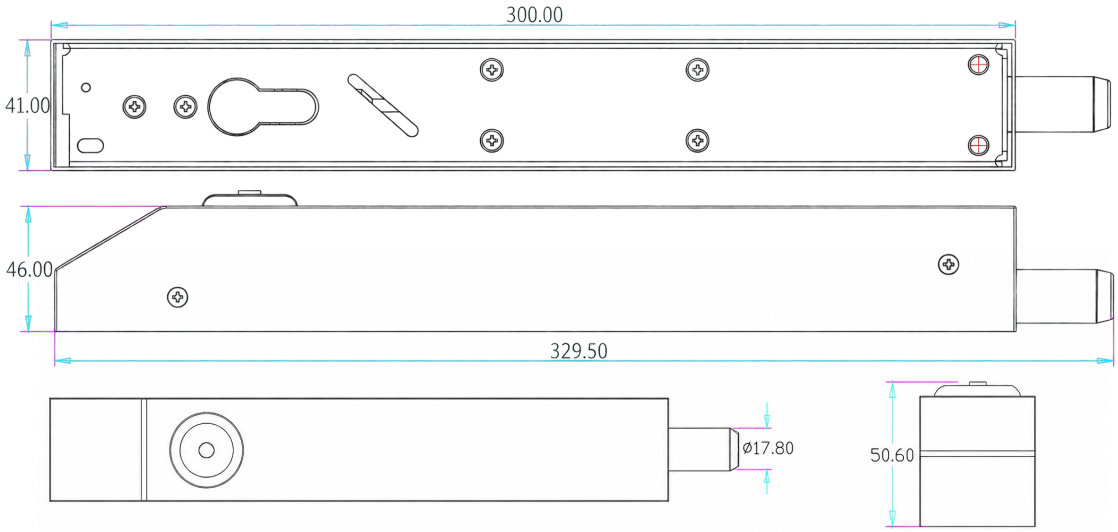

Wiring

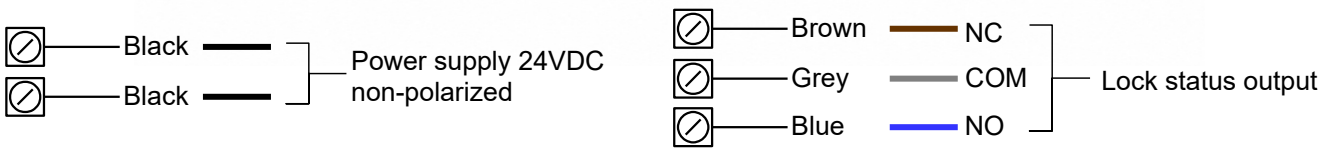

Installation example



